


## T Mount, Adj . . . Tougher & Smarter


## All Stainless Steel 316

- · Sturdy and corrosive resistant metal mount
- Attach by off-the-shelf two 5/16" Hex Nuts \*
- Two slots for 9/16" worm gear Hose Clamps
- Four spread neoprene Edge Trim legs between T Mount and Thruster (contoured)
- Weight 1.22 lb.

## Substantial Cost Savings

The cost incurred to craft a part by CNC machine milling process is near 2.5X more versus crafting the same functional part by use of CNC laser cutout and a bending process.



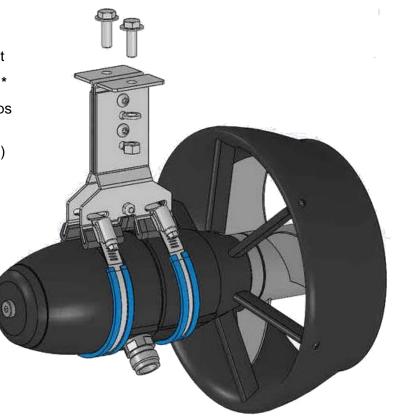

## **Feature**

- Adjustable height. Shown above is 7.0".
- Other lengths—7.50" and 8.0".
  Measured from Mount top surface to prop center axis.
- \* The cost of a conventional stainless steel 316 5/16" hex nut is about 1% of the cost to make a custom threaded hole *dowel nut* made of the same material.